




COIL - FLYING LEADS
Series Z615A – Z615Y

Z615..

ISO 9001

NON STANDARD

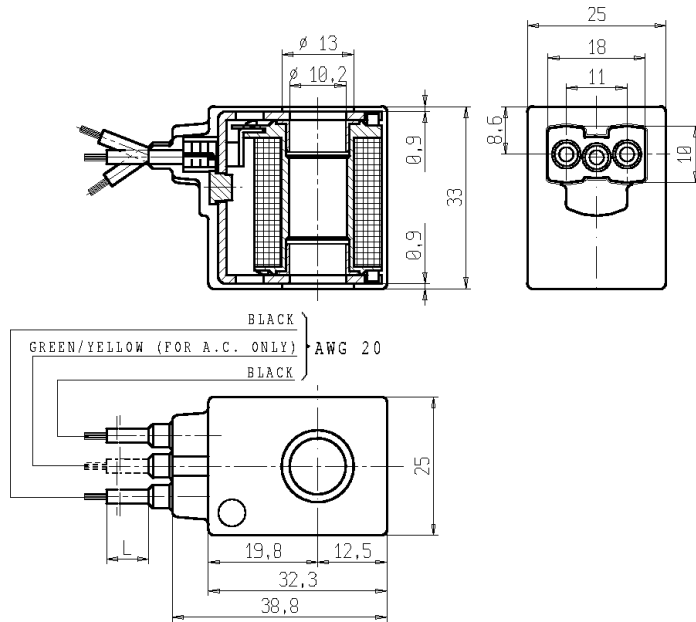

FEATURES - Rated for continuous duty (ED 100%) in alternate current (AC) or direct current (DC). Vacuum impregnated winding by polyester resin, insulation class and encapsulation material as per table.

AMBIENT TEMPERATURE - -10°C +60°C

PROTECTION DEGREE - IP66, according to EN 60529 standard.

ELECTRIC CONNECTIONS - N° 3 wires AWG 20 (2 line + earth) for AC model, length as per table.
 N° 2 wires AWG 20 (2 line) for DC model, length as per table.

STANDARD VOLTAGES - Alternate current (AC) 24 - 110 - 230V/50-60Hz.
 Direct current (DC) 12-24V.

TOLERANCE +10% -15% AC and +10% -5% DC.

TYPE	MAIN FEATURES	POWER ABSORPTION			Cable free length L	WEIGHT (kg)
		AC (VA)		DC (W)		
		Inrush	Holding			
Z615A	- Class "F" (+155°C) - Winding: wires in class "H" (+180°C) - Glass fibre reinforced PBT (Polybutylene-Terephthalate) encapsulation (blue colour)	16	10	6	400	0,095
Z615Y					1500	0,120

NOTES - Other voltages on request.

NB – THE VALIDITY OF REPORTED DATA IS REFERRED TO THE DATE OF ISSUE. POSSIBLE UPDATING ARE AVAILABLE ON REQUEST