


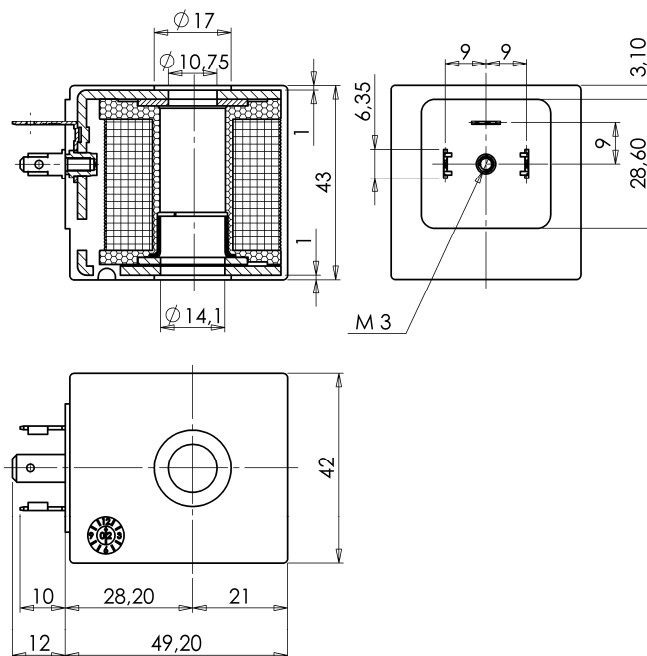

COIL

Spade terminals (DIN 46340)

Z130N

NON STANDARD

► GENERAL FEATURES

Complying with 73/23/EC directive and relative modification 93/68/EC.
Complying with VDE 0580 standard (100% inspected).

► ELECTRIC CONNECTIONS

Spade terminals 6,3 x 0,8 (DIN46340), 2 line + 1 earth terminals.
3 poles plug connector (DIN 43650)

► ENCAPSULATION MATERIALS

PET (polyethylene terephthalate) fiberglass reinforced (black colour)

► TECHNICAL FEATURES

Continuous duty	ED 100% ■
Insulation class	F (140°C)
Ambient temperature	-10°C +60°C
Protection degree	IP 65 (EN 60529) with plug connector
Voltages	DC 12-24V (+10% -5%) ■

TYPE	POWER ABSORPTION			NOTES	WEIGHT (kg)
	AC (VA)		DC (W)		
	Inrush	Holding			
Z130N	-	-	18	-	0,290

► NOTES

- – In case of use on L113B26 and L139B08: - Tolerance on voltages: +30% -30%
- Discontinuous duty: ED 50%