






The direct operated control valve D1FP of the nominal size NG06 (CETOP 03) shows extremely high dynamics combined with maximum flow. It is the preferred choice for highest accuracy in positioning of hydraulic axis and controlling of pressure and velocity.

Driven by the patented VCD actuator the D1FP reaches the frequency response of real servovalves. Compared with solenoid driven valves the D1FP can also be used in applications with pressure drops up to 350 bar across the valve. Because of the high flow capability the D1FP can be a substitute for NG10 valves in some cases.

At power-down the spool moves in a defined position. All common input signals are available.

Features

- Real servovalve dynamics
(-3 dB / 350 Hz at $\pm 5\%$ input signal)
- No flow limit up to 350 bar pressure drop through the valve
- Max. tank pressure 350 bar
(with external drain port Y)
- High flow
- Defined spool positioning at power-down – optional
P-A/B-T or P-B/A-T or center position
(for overlapped spools)
- Onboard electronics
- IO-Link interface for parametrizing
- RGB diode for optical status check
- NFC interface

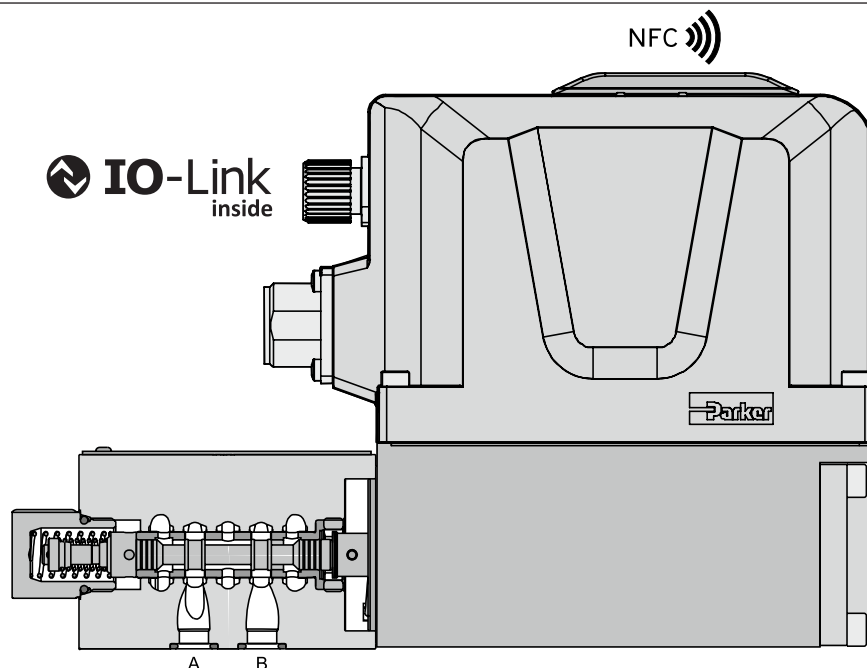

Ordering Code

Direct Operated Proportional DC Valve
Series D1FP

D	1	F	P			9				0	
Directional control valve	Size DIN NG06 CETOP 03 NFFPA D03	Proportional control	VCD	Spool type	Spool position on power down ¹⁾	Y-port (plugged) ⁵⁾	Seals	Command signal	Electronics option	Spool/sleeve design	Design series (not required for ordering)

Code	Spool type	Flow [l/min] at Δp 35 bar per metering edge
Zerolap		
E50B		3
E50C		6
E50F		12
E50G		16
E50H		25
E50M		40
B60C		6 / 3
B60F		12 / 6
B60G		16 / 8
B60H		25 / 12.5
B60M		40 / 20
Underlap		
E55B		3
E55C		6
E55F		12
E55G		16
E55H		25
E55M		40
Overlap		
E01B		3
E01C		6
E01F		12
E01G		16
E01H		25
E01M		40
B31C		6 / 3
B31F		12 / 6
B31G		16 / 8
B31H		25 / 12.5
B31M		40 / 20
E02B		3
E02C		6
E02F		12
E02G		16
E02H		25
E02M		40
B32C		6 / 3
B32F		12 / 6
B32G		16 / 8
B32H		25 / 12.5
B32M		40 / 20

Code	Connection type
0	6 + PE acc. EN175201-804
5	11 + PE acc. EN175201-804
7	6 + PE + Enable

Code	Signal	Function
B	+/- 10 V	0...+10 V -> P-A
E	+/- 20 mA	0...+20 mA -> P-A
S	4...20 mA	12...20 mA -> P-A

Code	Seals
N	NBR
V	FPM
H	for HFC fluid

Code	Spool position at power down
A ²⁾	
B ²⁾	
C ³⁾	
H ⁴⁾	
J ⁴⁾	

Short delivery time
for all variations

Note:

Adapter plate for ISO 4401 to ISO 10372 size 04, Ordering code HAP04WV06-1661

Please order connector separately, see chapter 3 accessories.

IO-LINK-MASTER-USB order no. 40983544

¹⁾ On power down the spool moves in a defined position. This cannot be guaranteed in case of single flow path on the control edge A – T resp. B – T with pressure drops above 120 bar or contamination in the hydraulic fluid.

²⁾ Approx. 10 % opening, only zero lapped spools and underlap spools.

³⁾ Only for overlapped spools.

⁴⁾ Flow for code M: 35 l/min at Δp 35 bar.

⁵⁾ Plug in the Y-port needs to be removed at tank pressure >35 bar.

General			
Design		Direct operated servo proportional DC valve	
Actuation		VCD® actuator	
Size		NG06 / CETOP 03 / NFPA D03	
Mounting interface		DIN 24340 / ISO 4401 / CETOP RP121 / NFPA	
Mounting position		unrestricted	
Ambient temperature		[°C]	-20...+60
MTTF _D value ¹⁾		[years]	150
Weight		[kg]	3.6
Vibration resistance		[g]	10 Sinus 5...2000 Hz acc. IEC 60068-2-6 10 (RMS) Random noise 20...2000 Hz acc. IEC 60068-2-64 15 Shock acc. IEC 60068-2-27
Hydraulic			
Max. operating pressure		[bar]	Ports P, A, B 350, port T 35 for internal drain, 350 for external drain, port Y 35 ²⁾
Fluid		Hydraulic oil according to DIN 51524 ... 535, other on request	
Fluid temperature		[°C]	-20...+60 (NBR: -25...+60)
Viscosity permitted		[cSt]/mm ² /s	20...400
Viscosity recommended		[cSt]/mm ² /s	30...80
Filtration		ISO 4406; 18/16/13	
Nominal flow			
at Δp=35 bar per control edge ³⁾		[l/min]	3 / 6 / 12 / 16 / 25 / 40
Flow maximum		[l/min]	90 (at Δp=350 bar over two control edges)
Leakage at 100 bar		[ml/min]	<400 (zerolap spool); <50 (overlap spool)
Opening point		[%]	set to 23 command signal (see flow characteristics)
Static / Dynamic			
Step response at 100 % step ⁴⁾		[ms]	<3.5
Frequency response			
(±5 % signal) ⁴⁾		[Hz]	350 (amplitude ratio -3 dB), 350 (phase lag -90°)
Hysteresis		[%]	<0.05
Sensitivity		[%]	<0.03
Temperature drift		[%/K]	<0.025
Interfaces			
IO-Link		IEC 61131-9	
NFC		ISO/IEC 15693 - NFC Forum Type 5 tag certified by the NFC Forum Frequency 13.56 MHz; -27.2 dBμA/m at 10 meters distance	
Electrical characteristics			
Duty ratio		[%]	100
Protection class		IP65 in accordance with EN 60529 (with correctly mounted plug-in connector) 6 = Full protection against contact, dust tight 5 = Protection against water jets (nozzle) from any angle	
Supply voltage/ripple		[V]	24 V nominal (tolerance range 22 ... 30V), electric shut-off at < 19, ripple < 5 % eff., surge free
Current consumption max.		[A]	3.5
Pre-fusing		[A]	4.0 medium lag
Input signal			
Code B	Voltage	[V]	10...0...-10, ripple <0.01 % eff., surge free, 0...+10 V P->A
	Impedance	[kOhm]	100
Code E	Current	[mA]	20...0...-20, ripple <0.01 % eff., surge free, 0...+20 mA P->A
	Impedance	[Ohm]	<250
Code S	Current	[mA]	4...12...20, ripple <0.01 % eff., surge free, 12...20 mA P->A
	Impedance	[Ohm]	<3.6 mA = disable, >3.8 mA = according to NAMUR NE43 <250
Differential input max.	Code 0	[V]	30 for terminal D and E against PE (terminal G)
	Code 5	[V]	30 for terminal 4 and 5 against PE (terminal ↓)
	Code 7	[V]	30 for terminal D and E against PE (terminal G)
Enable signal (only code 5/7)		[V]	acc. EN 61131-2; Type 3 Low -3...+5; High 11...30; input current 3 mA
Diagnostic signal		[V]	+10...0...-10
EMC		EN 61000-6-2, EN 61000-6-4	
Electrical connection		Code 0/7	6 + PE acc. EN 175201-804
		Code 5	11 + PE acc. EN 175201-804
Wiring min.	Code 0/7	[mm ²]	7x1.0 (AWG 16) overall braid shield
	Code 5	[mm ²]	8x1.0 (AWG 16) overall braid shield
Wiring length max.		[m]	50

¹⁾ If valves with onboard electronics are used in safety-related parts of control systems, in case the safety function is requested, the valve electronics voltage supply is to be switched off by a suitable switching element with sufficient reliability.


²⁾ For applications with p_r>35 bar (max. 350 bar) the Y-port has to be connected and the plug in the Y-port has to be removed.

³⁾ Flow rate for different Δp per control edge: $Q_x = Q_{Nom.} \cdot \sqrt{\frac{\Delta p_x}{\Delta p_{Nom.}}}$


⁴⁾ Measured with load (100 bar pressure drop/two control edges).

Flow curves


(Overlapped spool opening point 23 %)
 at $\Delta p = 35$ bar per metering edge
 Spool type **E01/E50**

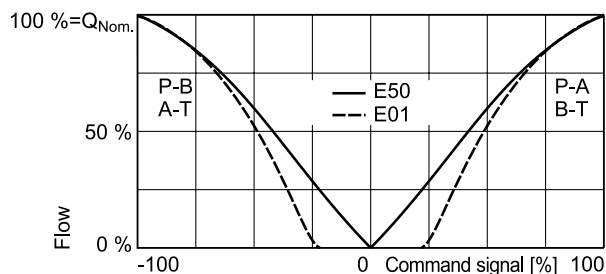

Spool type **B31/B60**

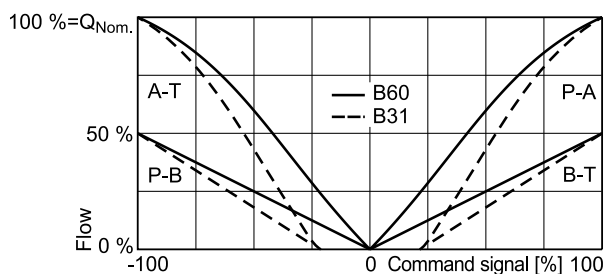


Pressure gain

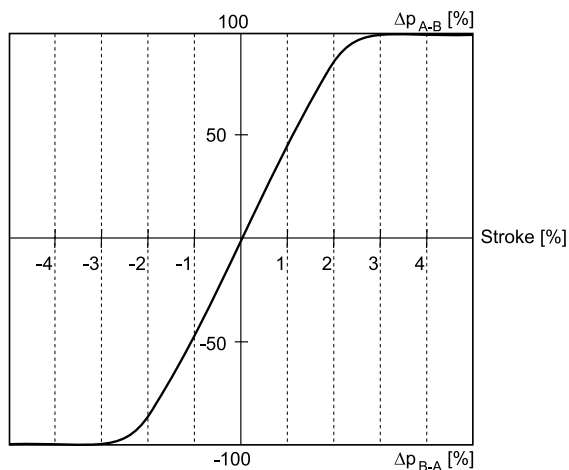

Functional limits


at 25 %, 50 %, 75 % and 100 % command signal

Spool type **E01M/E50M**

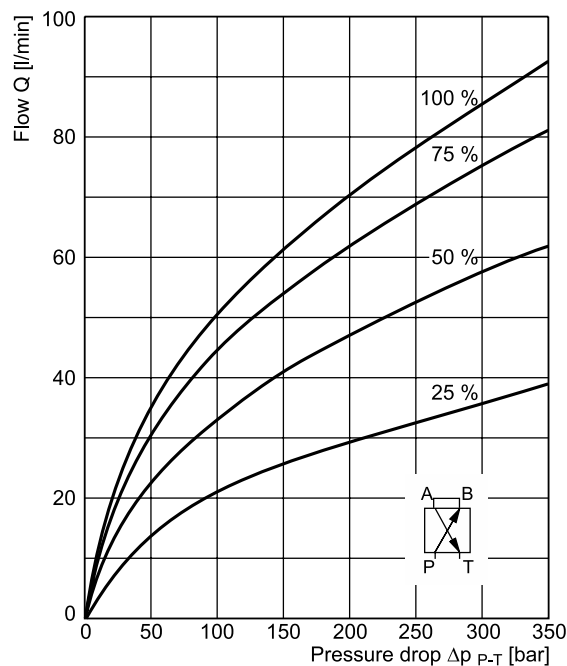


Frequency response

± 5 % command signal
 ± 90 % command signal

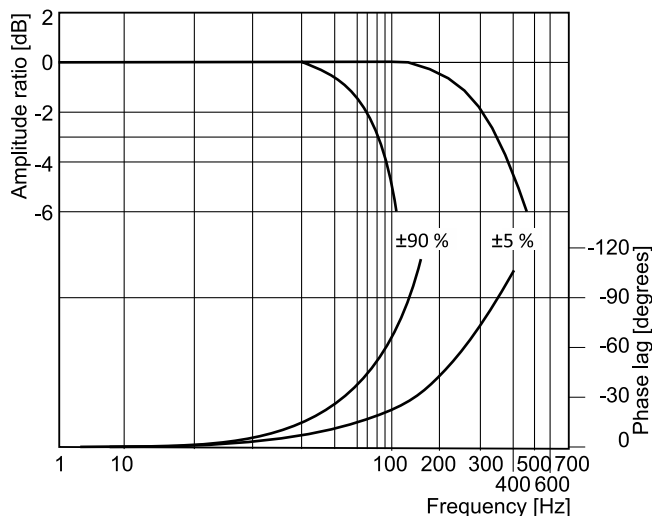


All characteristic curves measured with HLP46 at 50 °C.


Code 0

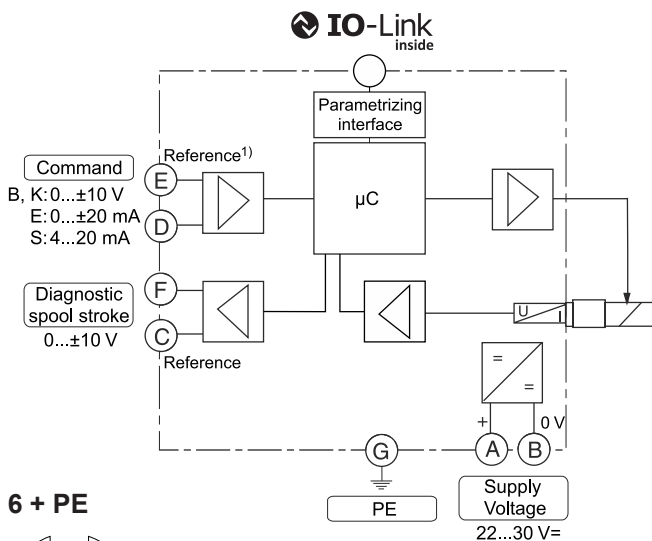


6 + PE




Code 5

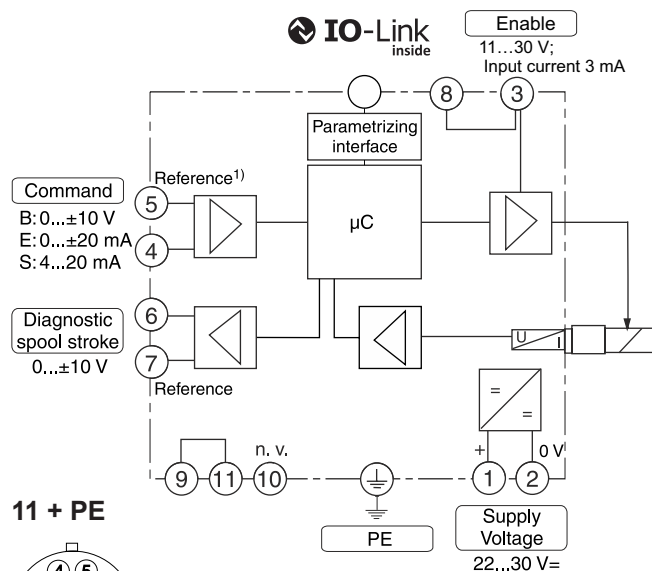


11 + PE




Code 7

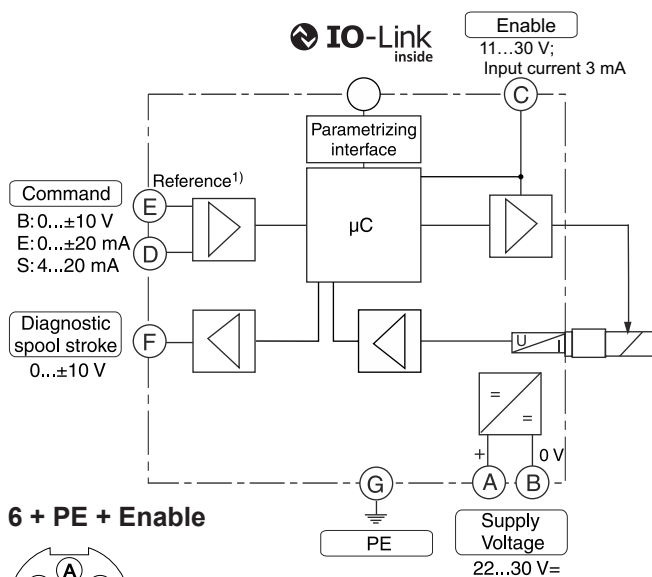

6 + PE + Enable



Pin assignment IO-Link (parametrizing) interface, M12 socket



PIN assignment acc. IEC 60974-5-2

- Pin 1: 24 VDC
- Pin 3: GND
- Pin 4: IO-Link Communication (C/Q)

¹⁾ Do not connect with supply voltage zero.

IO-Link interface

IO-Link communication takes place via the externally accessible M12 interface.

The IO-Link interface allows an external access to the available valve parameters via an IO-Link master or via the ProPxD software.

Parker IO-LINK-MASTER-USB order no. 40983544 (Parameter overview in the operating instructions)

NFC-Interface

The NFC interface allows a wireless access to valve data via the Parker APP Parker Device Control.

Available for free on the **App Store** and **Google Play Store**.


ProPxD parameterization software


The ProPxD software allows quick and easy setting of the digital valve electronics. Individual parameters as well as complete settings can be viewed, changed and saved via the comfortable user interface.


Parameter sets saved in the non-volatile memory can be loaded to other valves of the same type or saved for documentation purposes.

The PC software can be downloaded free of charge at www.parker.com/isde – see page "Support" or directly at www.parker.com/propxd.

Parker IO-LINK-MASTER-USB order no. 40983544

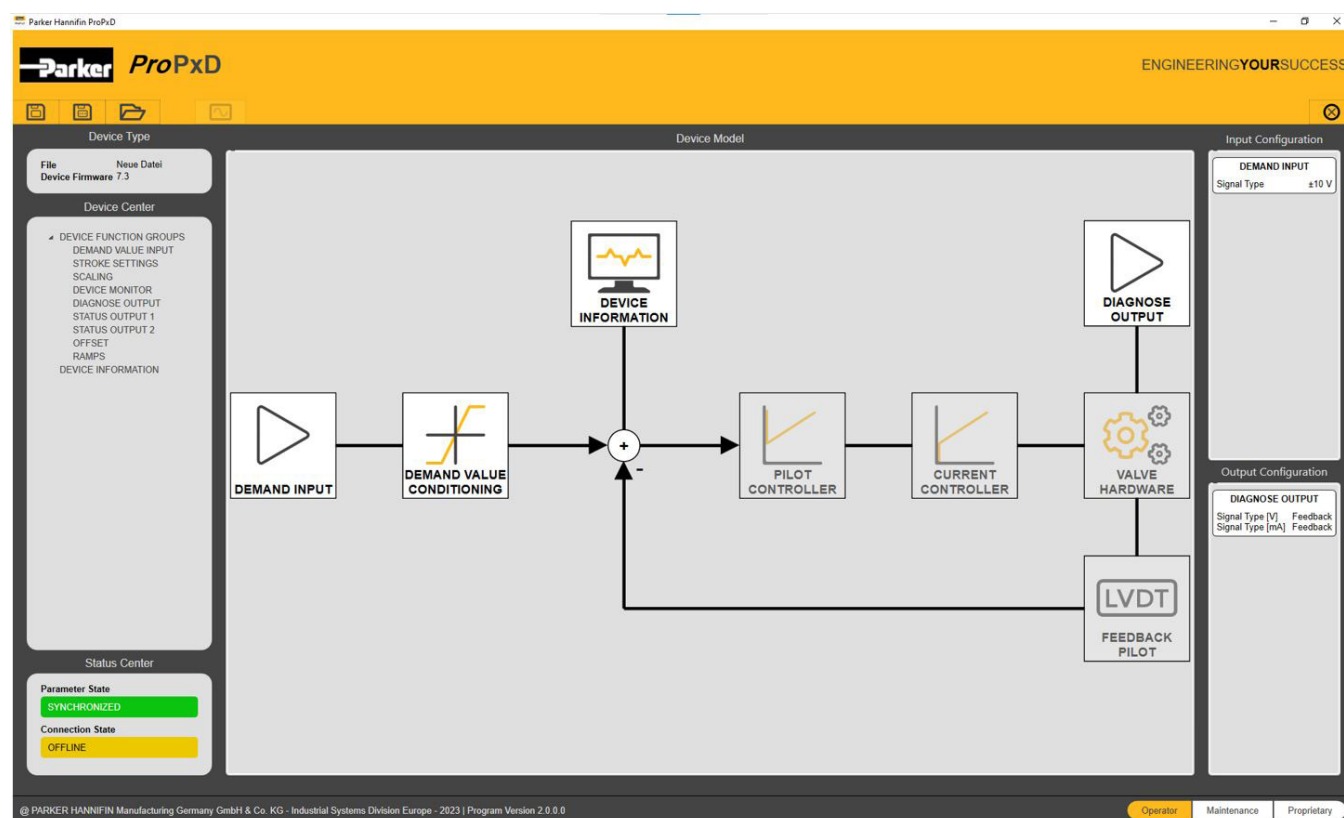

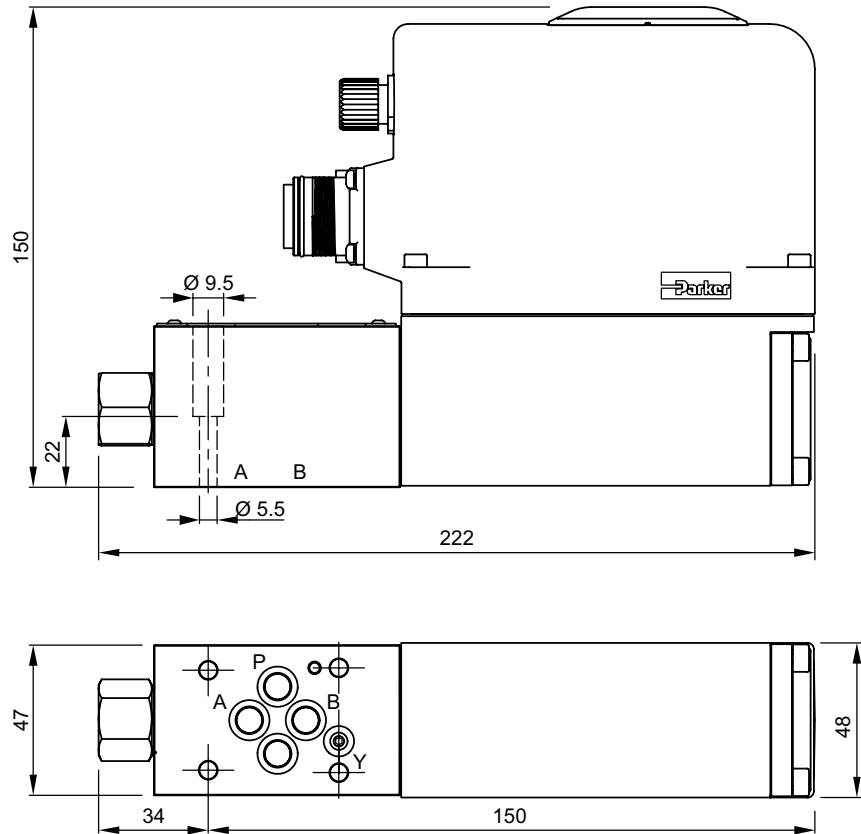

Surface finish	 Kit	 Kit	 Kit	 Kit
	BK375	4x M5x30 ISO 4762-12.9	7.6 Nm ±15 %	NBR: SK-D1FP FPM: SK-D1FP-V HFC: SK-D1FP-H